

# MAXIFY GX6060

## MegaTank

---

## TECHNICAL SPECIFICATIONS



**Canon**

# MAXIFY GX6060

## MegaTank



### ENJOY ECONOMICAL HIGH-YIELD PRINTING

Equipped with Canon's new mega-sized tanks, the MAXIFY GX6060 MegaTank boasts printing yields of up to 6,000 B&W A4 prints and up to 14,000<sup>1</sup> colour prints per set of ink bottles, reducing the need to think about replacing your printer's ink as frequently. Economy Mode helps you get even more from your MegaTank printer, achieving up to 9,000 A4 B&W pages and up to 21,000 colour pages per set of ink bottles<sup>2</sup>.



### SUPERCHARGED PRODUCTIVITY

The MAXIFY GX6060 MegaTank is equipped with a 50 A4 plain paper auto document feeder, a 100 A4 plain paper rear tray and a 250 A4 plain paper Cassette. With the capability of auto double sided printing.



### GET THE BENEFIT OF EASY MAINTENANCE

The MAXIFY GX6060 MegaTank is designed with a user-replaceable maintenance cartridge, ensuring your printer continues to run reliably day-to-day.



### ALL-IN-ONE PRINTING FOR YOUR BUSINESS MEDIA NEEDS

In addition to delivering high-quality documents, MAXIFY MegaTank printers offer compatibility with a wide range of media types and sizes. Create personalised letterheads, brochures, windowed envelopes, and banners up to 1.2m in length. Get creative with media finishes by making stickers with Canon Restickable Photo Paper and business cards with Canon Matte and Double-Sided Matte Paper just to name a few.



<sup>1</sup>Approx. yields are based on Canon original method using test patterns ISO/IEC 24712 (Colour chart). The estimated page yields are determined not based on the initial set of bundled ink bottles, but based on subsequent sets of ink bottles after print head nozzles have been filled with ink from the initial set of ink bottles. Black and colour page yields are not to be combined. Page yields varies significantly depending on contents printed and other factors.

<sup>2</sup>Economy mode plain paper Page Yield is an estimate.

### What inks can I use with my printer?

GI-66BK  
GI-66C  
GI-66M  
GI-66Y



### Maintenance Cartridge

MC-G01



# MAXIFY GX6060



## SPECIFICATIONS

### GENERAL FEATURES

<b>Model</b>	MAXIFY GX6060 MegaTank
<b>Ink Type</b>	4 Bottles (C/M/Y/BK All Pigment)
<b>Maximum Print Resolution</b>	600 dpi x 1,200 dpi*1
<b>Size</b>	Approx. 399 x 645 x 327mm Approx. 15.8 x 25.4 x 12.9 inch
<b>Weight</b>	Approx. 11.6 kg Approx. 25.6 lbs
<b>Display</b>	2.7" / 6.7 cm LCD (Monochrome)
<b>Interface</b>	USB-B Hi Speed
<b>Connectivity</b>	Wired LAN, Wireless LAN 2.4GHz & 5GHz, Direct Connection (Wireless LAN)
<b>Auto Double Sided Printing</b>	Available

### PRINT SPEED

<b>Document: Colour*2</b>	Approx. 15.5 ipm
<b>Document: Black &amp; White*2</b>	Approx. 24.0 ipm

### POWER CONSUMPTION

<b>OFF</b>	Approx. 0.2 W
<b>Copying*3 USB connection to PC</b>	Approx. 21 W
<b>Standby (MFP: scanning lamp is off) USB connection to PC</b>	Approx. 0.9 W
<b>Standby (all ports connected, MFP: scanning lamp is off)</b>	Approx. 1.6 W
<b>Time to enter Standby mode</b>	Approx. 5 min 04 sec
<b>Input Power</b>	AC 100-240 V, 50 / 60 Hz

### ENVIRONMENT

<b>Operating Environment**4</b>	Temperature: 5 - 35 °C Humidity: 10 - 90 %RH (no dew condensation)
<b>Recommended Environment**5</b>	Temperature: 15 -30 °C Humidity: 10 - 80 %RH (no dew condensation)
<b>Storage Environment</b>	Temperature: 0 - 40 °C Humidity: 5 - 95 %RH (no dew condensation)

### ACOUSTIC NOISE (PC PRINT)

<b>Quiet Mode</b>	Available
<b>Acoustic Noise (PC print) Plain Paper**6</b>	Approx. 49.0 dB(A)

### PRINT HEAD / INK

<b>Number of Nozzles</b>	Total 4,352 nozzles (BK: 1,280 nozzles, C/M/Y 1,024 nozzles)
<b>Compatible Inks</b>	GI-66BK, GI-66C, GI-66Y, GI-66M

### PRINTABLE WIDTH

	Up to 208 mm (8 inch)
--	-----------------------

### PRINTABLE AREA

#### Bordered Printing

- #10 Envelope, DL Envelope, Envelope C5, Monarch Envelope  
Top: 12.7 mm, Bottom: 12.7 mm, Right: 5.6 mm, Left: 5.6 mm
- Square(127 mm x 127 mm)  
Top: 6 mm, Bottom: 6 mm, Right: 6 mm, Left: 6 mm
- Other  
Top: 3 mm, Bottom: 5 mm, Right: 3.4 mm, Left: 3.4 mm
- Bordered Auto 2-sided printing  
Top: 5 mm, Bottom: 5 mm, Right: 4 mm, Left: 4 mm

### SUPPORT MEDIA

#### Rear Tray

Plain Paper (64 g/m<sup>2</sup> - 105 g/m<sup>2</sup>), High Resolution Paper (HR-101N), Photo Paper Plus Glossy II (PP-301), Photo Paper Pro Luster (LU-101), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701), Matte Photo Paper (MP-101), Envelope, Magnetic Photo Paper(MG-101), Restickable Photo Paper(RP-101), Light Fabric Iron on Transfers(LF-101), Double sided Matte Paper(MP-101D)

#### Cassette

Plain Paper (64 g/m<sup>2</sup> - 105 g/m<sup>2</sup>)

### PAPER SIZE

#### Rear Tray

A4, A5, A6, B5, LTR, LGL, STMT, B-Oficio, M-Oficio, Foolscap, FS, Executive, #10 Envelope, DL Envelope, C5 Envelope, Monarch Envelope, 4" x 6", 5" x 7", 7" x 10", 8" x 10", Square (127 mm x 127 mm). Custom size (width: 89 mm - 216 mm, length: 127 mm - 1,200 mm)

#### Cassette

A4, A5, B5, LTR, Executive. Custom size: width 148 mm - 216 mm, length 210 mm - 297 mm

### PAPER HANDLING (MAXIMUM NUMBER)

#### Rear Tray

Plain Paper (64 g/m<sup>2</sup>): 100  
4" X 6" - Photo Paper Plus Glossy II (PP-301), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701), Matte Photo Paper (MP-101): 20  
4" X 6" - Magnetic Photo Paper (MG-101), Restickable Photo Paper (RP-101): 1

#### Cassette

Plain Paper (64 g/m<sup>2</sup>): 250

#### Auto Document Feeder

Plain Paper (64 g/m<sup>2</sup>): 50 LGL: 10, others: 1

### PAPER WEIGHT

#### Rear Tray

Plain Paper: 64 g/m<sup>2</sup> -105 g/m<sup>2</sup>,  
Canon paper: max paper weight : approx. 275 g/m<sup>2</sup>,  
Photo Paper Plus Glossy II (PP-301)

#### Cassette

Plain Paper: 64 g/m<sup>2</sup> -105 g/m<sup>2</sup>

# MAXIFY GX6060



## SPECIFICATIONS

### SCANNER FUNCTIONS\*7

Scanner Type	Flatbed (ADF / Platen)
Optical Resolution*8	1,200 x 1,200 dpi
Scanning Bit Depth (Input/Output)	Grayscale: 16 bit / 8 bit Colour: RGB each 16 bit / 8 bit
Maximum Document Size	A4 / LTR

### COPY FUNCTIONS

Maximum Document Size	A4 / LTR
Compatible Media	Plain Paper (64 g/m <sup>2</sup> - 105 g/m <sup>2</sup> ), Photo Paper Plus Glossy II (PP-301), Photo Paper Pro Luster (LU-101), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701), Matte Photo Paper (MP-101), Light Fabric Iron on Transfers (LF-101)
Image Quality	3 positions (Economy, Standard, High)
Multiple Copy	Black & White / Colour: max. 99 pages

### PRINTING SOLUTION

Available for	AirPrint / Mopria / Canon Print Service (for Android) / PIXMA Cloud Link / Canon PRINT Inkjet/SELPHY (for iOS / Android)
Minimum System Requirements*9	Windows <sup>R</sup> 11, 10, 8.1, 7SP1. Windows Server 2022/2019/2016/2012 R2/2008 R2 SP1. macOS 10.15.7~13


### MAINTENANCE CARTRIDGE

Compatible Maintenance Cartridge	MC-G01
----------------------------------	--------

### What's in the Box?

Printer  
Power Cord  
Full set of Ink bottles  
Getting started guide

### Contents

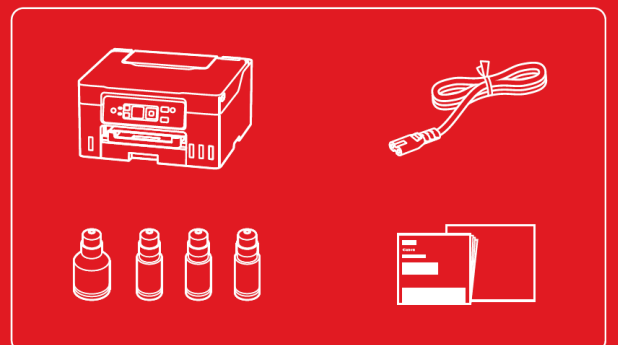

USB cable not included.

\*1: Ink droplets can be placed with a pitch of 1/600 inch at minimum.

\*2: Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734. Photo print speed is based on the default setting using ISO/JIS-SCID N2 on Photo Paper Plus Glossy II and does not take into account data processing time on host computer. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.

\*3: Copy speeds are the average of sFCOT and sESAT, ISO/IEC 29183. Copy speeds (ADF) are ESAT of copy in sequence, ISO/IEC24735. Copy speed may vary depending on document complexity, copy mode, page coverage, type of paper used etc. and does not take into account warming up time.

\*4: The performance of the printer may be reduced under certain temperature and humidity conditions.

\*5: For the temperature and humidity conditions of papers such as photo paper, refer to the paper's packaging or the supplied instructions.

\*6: Acoustic Noise is measured based on ISO7779 standard with default setting.

\*7: TWAIN driver (ScanGear) is based on the TWAIN specification V1.9 and requires the Data Source Manager comes with the operating system.

\*8: Optical resolution is a measure of maximum hardware sampling resolution, based on ISO 14473 standard.

\*9: Resolution may be changed between Direct print and printing from PC.

### Standard disclaimers:

- If your inkjet printer is found defective within the applicable manufacturer warranty period (1 Year), we'll replace it with the same, or an equivalent model. Excludes damage caused by external factors. Canon's full replacement promise is in addition to your rights under Australian Consumer Law which, depending on the type of fault, includes repair, replacement or a refund. For full terms see: [www.canon.com.au/printassist](http://www.canon.com.au/printassist) or the card in the printer box. Only for products purchased at Authorised Canon Australia retailers
- Photo print speed is based on the default setting using ISO/JIS-SCID N2 on Photo Paper Plus Glossy II and does not take into account data processing time on host computer. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.
- Approx. yields are based on Canon original method using test patterns ISO/IEC 24712 (Colour chart). The estimated page yields are determined not based on the initial set of bundled ink bottles, but based on subsequent sets of ink bottles after print head nozzles have been filled with ink from the initial set of ink bottles. Black and colour page yields are not to be combined. Page yields varies significantly depending on contents printed and other factors.
- Economy mode plain paper Page Yield is an estimate.
- AirPrint and Mopria are available for download via the Apple Store (iOS) and Play Store (Android).
- USB cable not included.

Note: Ink must be available in each ink-tank for all functions including copy, print and scan. Some functions may not work unless an internet connection established.

**Canon**

**[www.canon.com.au](http://www.canon.com.au)**  
**[www.canon.co.nz](http://www.canon.co.nz)**