

MAXIFY GX7060 MegaTank

TECHNICAL SPECIFICATIONS




MegaTank. Mega value for small business.

Canon

MAXIFY GX7060

MegaTank. Mega value for small business.

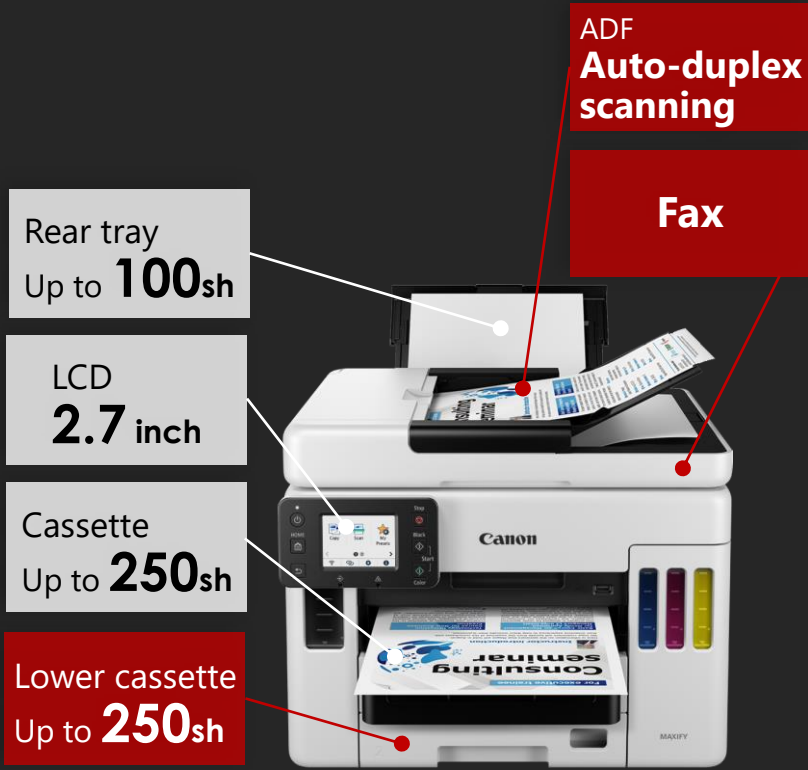

Print speed		Ink Yield			
Black 24.0 ipm	Colour 15.5 ipm	Black Ink [Standard] Approx. 6,000* sh	Black Ink [Economy] Approx. 9,000* sh	Colour Ink [Standard] Approx. 14,000* sh	Colour Ink [Economy] Approx. 21,000* sh

* Print yields are calculated with international test method ISO/IEC 24711, which use standard test prints designed to represent typical A4 documents, and testing in controlled conditions. Actual print yields will vary. Yields calculated with subsequent sets of ink/toner, printing continuously. During initial printer setup, a certain amount of ink is used to fill an inkjet print head's nozzles and so the page yield of the initial bundled set of ink is lower than that of subsequent sets. Printing smaller print jobs may lower the print yield when compared with printing continuously.

What inks can I use with my printer?

- GI66BK
- GI66C
- GI66M
- GI66Y



MAXIFY GX7060

MegaTank. Mega value for small business.



MEGA VALUE

SAVE MONEY ON PRINTING COSTS

Ink/toner cost per page is reduced by at least 90%¹ when comparing ink RRP for MAXIFY GX7060 MegaTank to toner RRP of an equivalent laser multi-function printer, such as the Canon IMAGECLASS MF746Cx, when printing like-for-like documents. .

ENJOY HIGH-QUALITY PRINTING AT A LOW COST

Equipped with Canon's new mega-sized tanks, the MAXIFY GX7060 MegaTank boasts printing yields of up to 6,000 B&W A4 prints and up to 14,000 colour prints per set of ink bottles, reducing the need to think about replacing your printer's ink as frequently. Economy Mode helps you get even more from your MegaTank printer, achieving up to 9,000 A4 B&W pages and up to 21,000 colour pages per set of ink bottles.²

MEGA EFFICIENCY

SAVE TIME WITH QUICK PRINTING

MAXIFY MegaTank printers can print quickly with no initial heat up time - unlike laser printers which need to preheat the fuse. This means fast First Print Outs (FPOT) B&W in approximately 7 seconds.³ Get your business quality prints quicker.

SUPERCHARGED PRODUCTIVITY

The MAXIFY GX7060 MegaTank printer can keep up with your high-volume demands, equipped with auto duplex scanning, auto two-sided printing, 50 sheet Auto Document Feeder and high-capacity double cassette front, and rear paper feeding totalling 600 sheets of plain paper needed for those very productive environments.

MEGA VERSATILITY

ALL-IN-ONE PRINTING FOR YOUR BUSINESS MEDIA NEEDS

In addition to delivering high-quality documents, the MAXIFY GX7060 MegaTank offers compatibility with a wide range of media types and sizes. Create personalised letterheads, brochures, windowed envelopes, and banners up to 1.2m wide. Get creative with media finishes by making stickers with Canon Restickable Photo Paper and business cards with Canon Matte and Double-Sided Matte Paper just to name a few.

¹ The savings are calculated as the ink/toner set cost difference between MAXIFY GX7060 MegaTank and imageCLASS MF746Cx = $(\$0.0205 \text{ cost per page} / \$0.3932 \text{ cost per page}) - 1 = -94.79\%$. Costs based on RRP of individual inks being \$44.99 for colour and \$64.99 for black, and toner being \$219.70 for colour and \$182.42 for black as at April 2021 and max page yields calculated using international standard test prints. Actual cost per page will vary based on print tasks and volumes, usage conditions and the retail price of the ink/toner.

MAXIFY MegaTank print yields are calculated with international test method ISO/IEC 24711 and imageCLASS MF746Cx print yields are calculated with international test method ISO/IEC 19798 using equivalent test pages ISO/IEC 24712:2007 and ISO/IEC 19752, which use standard test prints designed to represent typical A4 documents, and testing in controlled conditions. Actual print yields will vary. Yields for inkjet calculated with subsequent set of inks, printing continuously. During initial printer setup, a certain amount of ink is used to fill an inkjet print head's nozzles and so the page yield of the initial bundled set of ink is lower than that of subsequent sets. Printing smaller print jobs may lower the print yield when compared with printing continuously.

² Yields are calculated with international standard ISO/IEC 24734, using test prints designed to represent typical A4 office documents. During the initial printer setup, a certain amount of ink is used to fill the print head's nozzles with ink. Therefore, the page yield of the initial bundled set of ink bottles will be lower than that of the subsequent sets of bottles. The estimated page yield and/or print cost stated in brochures/catalogues/websites etc. is/are determined not based on the initial set of bundled ink bottles, but based on subsequent sets of ink bottles after print head nozzles have been filled with ink from the initial set of ink bottles.

³ Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734.



MAXIFY GX7060

SPECIFICATIONS



Model	MAXIFY GX7060 MegaTank
GENERAL FEATURES	
Ink Type	4 Bottles (BK/C/M/Y)
Maximum Print Resolution	600 dpi x 1,200 dpi
Size	Approx. 399 x 645 x 387 mm
Weight	Approx. 13.0 kg
Display	2.7" / 6.7cm LCD (Touch Screen, Colour)
Interface	USB / Wi-Fi / Ethernet
Input Power	AC 100 V - 240 V, 50 Hz / 60 Hz
PRINT SPEED	
Document: Colour¹	Approx. 15.5 ipm
Document: Black & White¹	Approx. 24 ipm
AUTO DOCUMENT FEEDER	
Paper Handling (Plain Paper)	A4, LTR: 50 LGL: 10 Others: 1
Auto Duplex	Available (Single pass 2-sided)
POWER CONSUMPTION	
OFF	Approx. 0.2 W
Standby (MFP: scanning lamp is off)	Approx. 0.9 W
USB connection to PC	Approx. 0.9 W
Standby (all ports connected, MFP: scanning lamp is off)	Approx. 1.5 W
Time to enter Standby mode	Approx. 5 min
Copying² USB connection to PC	Approx. 23 W
ENVIRONMENT	
Operating Environment³	Temperature: 5-35 ° C Humidity: 10-90 %RH (no dew condensation)
Recommended Environment⁴	Temperature: 15-30 ° C Humidity: 10-80 %RH (no dew condensation)
Storage Environment	Temperature: 0-40 ° C Humidity: 5-95 %RH (no dew condensation)
ACOUSTIC NOISE (PC PRINT)	
Quiet Mode	Available
Acoustic Noise (PC Print) Plain Paper⁵	Approx. 49.0 dB(A)
PRINT HEAD / INK	
Number of Nozzles	Total 4,352 nozzles (BK: 1,280 nozzles, C/M/Y: 1,024 nozzles)
PRINTABLE WIDTH	
	Up to 208.0 mm (8")
PRINTABLE AREA	
Bordered Printing	#10 Envelope, DL Envelope, Envelope C5, Envelop manarch Top: 12.7 mm, Bottom: 12.7 mm, Right: 5.6 mm, Left: 5.6 mm
	B-Oficio, M-Oficio, Foolscap, FS, LTR, LGL Top: 3 mm, Bottom: 5 mm; Right 4 mm; Left 4 mm
	Square (127 mm x 127 mm) Top: 6 mm, Bottom: 6 mm: Right: 6 mm, Left: 6 mm
	Custom size Top: 3 mm, Bottom: 5 mm, Right: 3.4 mm, Left: 3.4 mm
	Other Top: 3 mm, Bottom: 5 mm, Right: 3.4 mm, Left: 3.4 mm
Bordered Printing Auto 2-Sided Printing	LTR Top: 5 mm, Bottom: 5 mm, Right: 4 mm, Left: 4 mm
	Other Top: 5 mm, Bottom: 5 mm, Right: 3.4 mm, Left: 3.4 mm

MAXIFY GX7060

SPECIFICATIONS (CONTINUED)



Model	MAXIFY GX7060 MegaTank
SUPPORT MEDIA	
Rear Tray	Plain Paper (64 g/m ² - 105 g/m ²), High Resolution Paper (HR-101N), Photo Paper Plus Glossy II (PP-301) (For Pan-American/OCEANIA), Photo Paper Pro Luster (LU-101), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701) (For North America/OCEANIA), Matte Photo Paper (MP-101), Envelope, Magnetic Photo Paper(MG-101) (For except China), Restickable Photo Paper(RP-101)(For except China), Greeting Card (manufactured by Avery and RedRiverPaper), Greeting Card (manufactured by Avery and RedRiverPaper), Light Fabric Iron on Transfers (LF-101), Dark Fabric Iron-on Transfers (DF-101), Double sided Matte Paper(MP-101D).
Cassette 1	Plain Paper (64 g/m ² - 105 g/m ²)
Cassette 2	Plain Paper (64 g/m ² - 105 g/m ²)
PAPER SIZE	
Rear Tray	A4, A5, A6, B5, LTR, LGL, B-Oficio, M-Oficio, Foolscap, FS, Executive, #10 Envelope, DL Envelope, C5 Envelope, Monarch Envelope, 4" x 6", 5" x 7", 7" x 10", 8" x 10", Square (127 mm x 127 mm) Custom size (width: 89 mm - 216 mm, length: 127 mm - 1,200 mm).
Cassette 1	A4, LTR, A5, B5
Cassette 2	A4, LTR
PAPER HANDLING (MAXIMUM NUMBER)	
Rear Tray	Plain Paper (LTR size): 100 Plain Paper (A4 size): 100 Photo Paper (4" x 6"): 1
Cassette 1	Plain Paper (LTR size): 250 Plain Paper (A4 size): 250
Cassette 2	Plain Paper (LTR size): 250 Plain Paper (A4 size): 250
SUPPORT MEDIA FOR AUTO 2-SIDED PRINTING	
Type	Plain Paper
Size	A4 / A5 / B5 / LTR
PAPER WEIGHT	
Rear Tray	Plain Paper: 64 g/m ² - 105 g/m ² Canon paper: Max. paper weight Approx. 275 g/m ² Photo Paper Plus Glossy II (PP-301) (for Pan-American / Oceania)
Cassette 1	Plain Paper: 64 g/m ² - 105 g/m ²
Cassette 2	Plain Paper: 64 g/m ² - 105 g/m ²
SCANNER FUNCTIONS	
Scanner Type	Flatbed (ADF / Platen)
Scanning Method	CIS
Optical Resolution⁶	1,200 dpi x 1,200 dpi
Scanning Bit Depth (Input / Output)	Grayscale: 16 bit / 8 bit Colour: RGB each 16 bit / 8 bit
Maximum Document Size	Flatbed: A4 / LTR (216 mm x 297 mm) ADF: A4 / LTR / LGL

MAXIFY GX7060

SPECIFICATIONS (CONTINUED)



Model	MAXIFY GX7060 MegaTank
COPY FUNCTIONS	
Maximum Document Size	A4 / LTR
Size	A4, A5, B5, LTR, LGL, Executive, FS, Foolscap, B-Oficio, M-Oficio, 4" x 6", 5" x 7", Square (127 mm x 127 mm).
Compatible Media	Plain Paper, Photo Paper Plus Glossy II (PP-301) (for Pan-American / Oceania), Photo Paper Pro Luster (LU-101), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701) (for North America / Oceania), Matte Photo Paper (MP-101), Dark Fabric Iron on Transfers (DF-101), Light Fabric Iron on Transfers (LF-101).
Image Quality	3 positions (Economy, Standard, High)
Copy Speed	Document Colour: Approx 12 sec, 12.7 ipm
Multiple Copy	Max. 99 pages
FAX	
Applicable Line	PSTN
Transmission Speed⁷	Black: Approx. 3 sec Colour: Approx. 1 min
Fax Resolution	Black: 8pels/mm x 3.85 lines/mm(Standard) 8pels/mm x 7.7 lines/mm(Fine) 300 dpi x 300 dpi (Extra Fine) Colour: 200 dpi x 200 dpi
Print Size	A4, LTR, LGL
Scanning Width	A4 , LTR
Modem Speed	Maximum 33.6 kbps (Automatic fall back)
PRINTING SOLUTIONS	
Available for	AirPrint / Mopria / Canon Print Service (for Android) / PIXMA Cloud Link / Canon PRINT Inkjet/SELPHY (for iOS / Android)

¹ Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734.

² Copy: When copying ISO/JIS-SCID N2 (printed by inkjet printer) on A4 size plain paper using default settings.

³ The performance of the printer may be reduced under certain temperature and humidity conditions.

⁴ For the temperature and humidity conditions of papers such as photo paper, refer to the paper's packaging or the supplied instruction.

⁵ Acoustic Noise is measured based on ISO7779 standard with default setting.

⁶ Optical resolution is a measure of maximum hardware sampling resolution, based on ISO 14473 standard.

⁷ Black & white document fax transmission speed is based on default setting using ITU-T No.1 chart. Colour document fax transmission speed is based on default setting using Canon Colour Fax Test Sheet. Actual transmission speed may vary depending on document complexity, fax settings at receiving end, and line conditions etc.

Canon

www.canon.com.au