



**Model Name**

**IL5501**

**Unique selling point**

- \*Quad-core processor, 3GB memory, 32GB storage, Android 8.0
- \*Germ resistant on screen certified by SIAA and TÜV, and stylus pens certified by TÜV
- \*4K UHD display, 3.2mm, 9H tempered
- \*Brightness 400 nits, Anti-glare coating, Low blue light
- \*Speaker 10W\*2, OPS slot
- \*Built-in annotation software EZWrite 5 / Wireless Casting software InstaShare
- \*Account management system (AMS) provides personalized workspace
- \*DMS Cloud/Local for convenient device management

<b>Panel</b>	Screen Size (inch)	55"
	Backlight	Direct LED
	Active Area (horizontal ×	1209.6 x 680.4 mm
	Resolution (pixels)	3840 x 2160
	Brightness (typical)	400 nits
	Contrast Ratio (typical)	1300: 1
	Light Life (typical)	50,000hrs
<b>Touch solution</b>	Display Orientation	Landscape / Portrait
	Touch tech.	IR
	Number of touches	Up to 40 Point Multi-touch
<b>Audio</b>	Resolution	32768 x 32768
	Internal Speaker (Amp)	10W x 2
<b>Connectivity</b>	Audio In/Out	PC Audio Input x1 / Line Out x1
	VGA In/Out	x1 / N/A
	Display Port Input/Output	x1 (1.2) / No
	HDMI In/Out	x2 (2.0) / x1 (2.0)
	USB port (Type A)	x2 (2.0)
	Touch interface	USB (type B) x 1
<b>Control</b>	RJ45 Port	Yes
	RS232 control	Yes
<b>Power</b>	IR In/Out	No / x1
	AC/DC In	AC
	Voltage	100 ~ 240Vac, 50Hz / 60Hz
<b>Mechanical</b>	Power Consumption	111W / <0.5W
	Dimension (WxHxD) (mm)	1284.1 x 754.9 x 92.6
	Bezel Width (top/bottom/left/right)	16.6   16.6   16.6   16.6
	Weight (w/o Packing   w/ Packing)	29.1kg   35.2kg
<b>Environment</b>	Wall Mounting (VESA) (mm)	400 x 400 (4 holes); 4 - M6 x 15L
	Operation Temperature	0°C ~ 40°C
	Storage Temperature	-10°C ~ 60°C
<b>OSD</b>	Usage (Hour/Day)	24/7
	On-Screen Display Languages	EN/EF/GM/DT/PL/RS/CZ/DN/SW/IT/RM/FN/NG/GK/HG/SP/EP/T C/CN/AB/JP/TH/PS/VT/KR/TK/ID (27 Languages)
<b>Software</b>	Digital Broadcasting	X-Sign Broadcast
	CMS	X-Sign 2.0
	Device Management	DMS Cloud/Local
	Video Conference	Teamviewer Meeting
	Office Document Viewer	WPS
	Browser	Firefox
	Maintenance	Teamviewer QS
<b>Accessory</b>	Remote Control	Yes
	Power Cord(by region)	Yes
	VGA / HDMI / DVI / DP / USB(for	x1(1.5m) / x1(1.5m) / No / x1(1.5m) / x1(1.5m)
	Quick Start Guide	Yes
	User's Manual Electronic File	Yes
	Wall Mount	x1
Touch Pen	x2	

# IL5501 built-in software, management solutions, certification



## Dimension (mm)

Top view


Side view

Side view



Bottom view

Germ resistant stylus pens

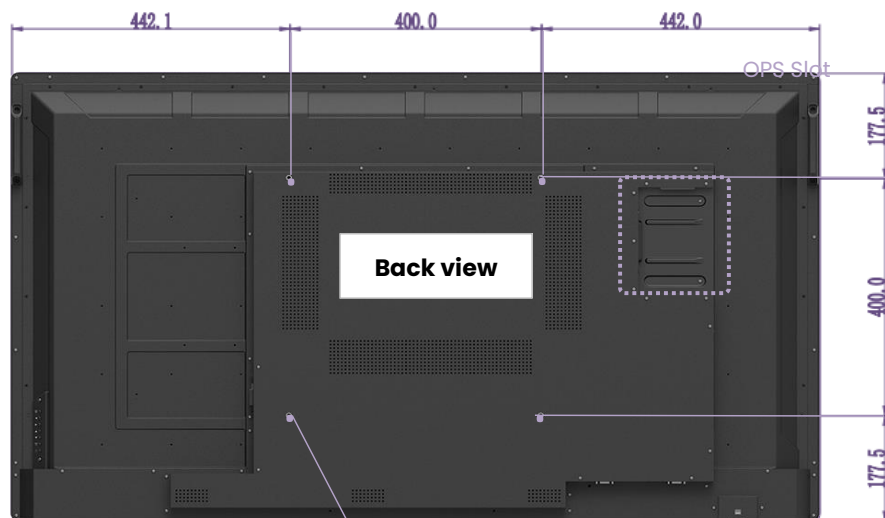

SCREW THREAD DEPTH :  
4-M6x15mm

