43MDO70FA55 43", 700nit, IP55, A-Frame

Specifications

External Control

Content Management

Wi-Fi

Speaker

RJ45 (LAN)

2W×2

802.11 b /g /n

Optional (Fusion Signage)

MITSUMARU Smart Digital Signage



Exposing the display to direct sunlight is not recommended

Features:

- · Powder Coated, Galvanised Steel, IP55, Enclosure.
- · 700nit Brightness, FHD (1920 x 1080) Resolution.
- · Mobile Signage Solution.
- · Indoor & Outdoor Applications.
- · Tempered, Anti-Glare Glass Panel.
- · Available in Black Only.
- · Up to 12 hours usage from a full charge.
- · 3 Year Commercial Warranty




Power Adapter & Operating Parameters Panel Power Supply (Input) AC100-240V, 50/60Hz Model 43MD070FA55 Power Supply (Output) 60Hz, 29.4V, 5A. Backlight I F D 5.5 x 2.1 x 12mm DC - 1200mm (Cable Length) Power Adapter (Cable) Screen Size 43" **Operating Temperature** -0°C~+40°C(32°F~104°F) Aspect Ratio 16.9 Operating Humidity 10%~80% 1920 x 1080 (FHD) Resolution 1.07B (10 bits) **Display Colors Dimensions** Brightness 700nits Dimensions (W x H x D) 609mm x 1112mm x 429mm 1200:1 Contrast Ratio Enclosure (Black Only) Fine Grain, Powder Coated, Galvanized Steel (RAL 9005) Viewing Angle (H×V) 178°/178° Net Weight 49kg Display Mode Portrait Gross Weight 68kg Lifecycle - MTBF (Hours) 50000 **Accessories** Ports Included Power Cord, Remote Control, Charger, Antenna. Input RJ45 ×1, USB ×2, TF Slot ×1, HDMI ×1, Headphone Jack ×1

Processing

CPU	Quad Core Cortex A55 - 1.92GHz CPU
Operating System	Android 9.0
Ram / Storage	2Gb / 8Gb

43MDO70FA55 A- Frame



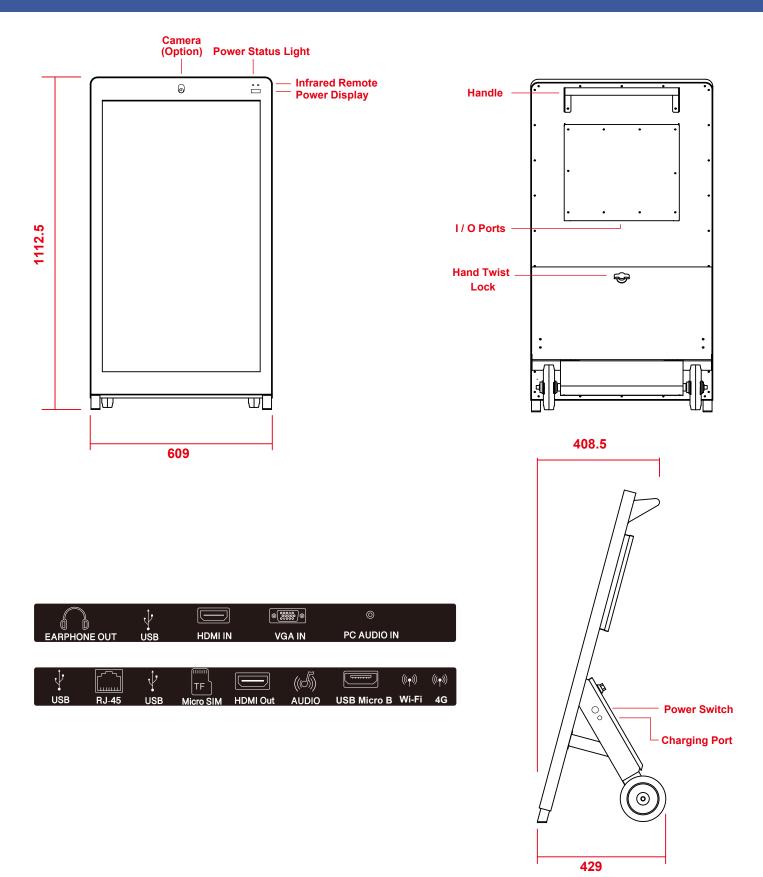

Mitsumaru (AU) Pty Ltd. All specifications and images are correct at the time of publication. Alterations to specifications, drawings, images may change without further notification.