


## Key **Features**

- Easily extend your content from laptops and mobile devices
- One-cable solution for audiovisual, power, and touch signal transmission
- Flexible display setup work at any angle
- Compact size, light weight, and highly portable
- · Sturdy and durable design



## Product **Description**

The ViewSonic TD1655 is a portable 16" Full HD touch monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual, power, and touch signal transmission. The adjustable wide stand and pivot-able display will support your working angles. With the anti-slip cover, stainless case, aluminum stand, and 6H hardness screen, reliability is embodied in the design.

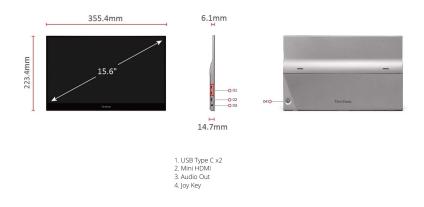

DISPLAY		VIDEO INPUT	
Display Size (in.):	16	Digital Sync:	TMDS - mini HDMI (v1.4), Micro-
Viewable Area (in.):	15.6	c ,	Packet - Type C
Panel Type:	IPS Technology	ERGONOMICS	
Resolution:	1920 x 1080	Tilt (Forward/Back):	20° / 60°
Resolution Type:	FHD	WEIGHT (IMPERIAL)	
Static Contrast Ratio:	800:1 (typ)	Net (lbs):	2.1
Dynamic Contrast Ratio:	50M:1	Net Without Stand (lbs):	2.1
Light Source:	LED	Gross (lbs):	5.1
Brightness:		WEIGHT (METRIC)	
Colors:	250 cd/m² (typ)	Net (kg):	1
	262K	Net Without Stand (kg):	1
Color Space Support:	6 bit true	Gross (kg):	2.3
Aspect Ratio:	16:9	DIMENSIONS (IMPERIAL) (W	XHXD)
Response Time (Typical GTG):	6.5ms	Packaging (in.):	17.3 x 11.3 x 3.5
Response Time (GTG w/OD):	6.599ms	Physical (in.):	14 x 8.8 x 0.6
Response Time (Typical Tr+Tf):	30ms	Physical Without Stand (in.):	14 x 8.8 x 0.6
Viewing Angles:	178° horizontal, 178° vertical, CR>5; 170° horizontal, 170° vertical, CR>10	DIMENSIONS (METRIC) (WX	HXD)
Backlight Life (Hours):	15000 Hrs (Min)	Packaging (mm):	440 x 288 x 89
Curvature:	Flat	Physical (mm):	355 x 223 x 16
Refresh Rate (Hz):	60	Physical Without Stand (mm):	355 x 223 x 16
Blue Light Filter:	Yes	GENERAL	
Color Gamut:	NTSC: 45% size (Typ), sRGB: 64% size (Typ)	Regulations:	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Bronze, CEC, NRCan, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UKrSEPRO,
Pixel Size:	0.179 mm (H) x 0.179 mm (V)		
Touch Screen:	Projected Capacitive, 10-point multi- touch	PACKAGE CONTENTS: Type-C to Type-A 3.2 Gen1 Cable (Male-Male) x1, AC/DC Adapter x1	
Surface Treatment:	Glossy w/ anti-finger print, Hard Coating (≧6H)		Type-C Cable (Male-Male) x1, USB
Cover Glass Thickness:	0.8mm		
COMPATIBILITY			x1, Clean cloth x1, Passive touch per x1
PC Resolution (max):	1920x1080		Please dispose of in accordance with
Mac® Resolution (max):	1920x1080	Recycle/Disposal:	local, state or federal laws.
PC Operating System:	Windows 10 certified; macOS tested	Warranty:	*Warranty offered may differ from
Mac® Resolution (min):	1920x1080	Dawe Management	market to market
CONNECTOR		Power Management:	Energy Star standards, EPEAT
USB 3.1 Type C:	2		
3.5mm Audio Out:	1		
Mini HDMI:	1		
Power in:	External power adapter		
AUDIO	External power adapter		
Internal Speakers:	0.8Watts x2		
POWER	O.OFFAILS AZ		
Eco Mode (Conserve):	6W		
, ,	6.9W		
Eco Mode (optimized):			
Consumption (typical):	8W		
Consumption (max):	8.3W		
Voltage:	AC 100-240V, 50/60 Hz		
Stand-by:	0.5W		
Power Supply:	External		
CONTROLS			
Physical Controls:	Up, Right, Down, Left, Power		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
OPERATING CONDITIONS	· · · · ·		
Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%		
INPUT SIGNAL			
Farmer Made at 1	45 001/11		

Frequency Horizontal:

Frequency Vertical:

15 ~ 82KHz

50 ~ 75Hz